

More choice, better quality – The EMC edge


Our architectural tiles transform hard floors and surfaces into attractive, slip-resistant, comfortable areas – perfect for daycare centers, churches, shopping malls, utility areas, walkways, garages, and around swimming pools.

"Once again thank you so much for the phenomenal response. It is a pleasure to work with a company as committed as EMC to servicing the customers".


Emily Bristow, SoftPlay

Tech Data


Tile Top View

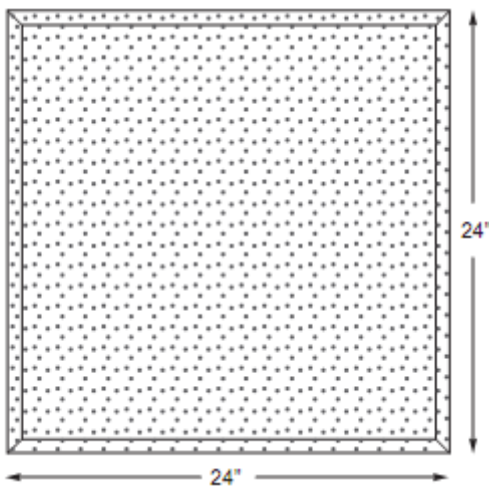

Tile Bottom View

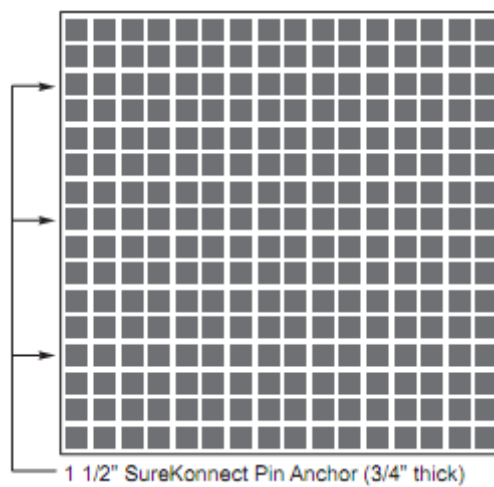

Tile Side View
(Two thickness)

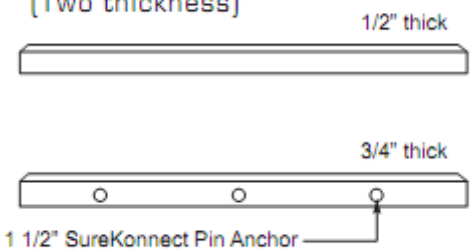

NOTE: Dimensions are 24" x 24" (+ or - 1/8")

Physical Properties

Test Description	ASTM	Result	Finish Options
Flame Spread	E108	Class A	Paver Tiles are available in Flat Top or Brick Top patterns in 11 standard colors. (Brick Top only available in 3/4")
Flammability	E648	Class II	
Flammability	2859	Pass	
Toxicity	2075	Lead Free	
Slip Resistance	F1677	Dry 0.63, Wet .052	
Skid Resistance	E303	Dry 96, Wet 47	
Tensile Strength	D412	1175.3 psi	
Wear Resistance	D3884	1.64% Loss/3000c	
UV Resistances	QPanel QUV	<3.0/4032 ksqm	



14050 Day Street
Moreno Valley, CA 92553
(888) 836-2665
www.EMCMolding.com

Better Quality, More Choice
The EMC EDGE